

# KB-0112-Change colour palette of the UDP digitizer card

## GENERAL

<b>Distribution</b>	<b>OEM/Partner/Distributor</b>	<b>Installer</b>	<b>Customer</b>
	YES	YES	YES
<b>Last Update</b>	02-02-2010		
<b>Product</b>	WebCCTV, GuardNVR		
<b>Version</b>	4.3.0.0 and earlier		

## DESCRIPTION


This document describes how to change color palette for the digitizer card. This is valid for UDP digitizer cards (white BNC slots at back of the card or the ones where separate cables are attached to the card on which the analogue cables are connected).

## SOLUTION

1. **Stop** video server
2. **Start** → **Run...** → **CMD**, type **regedit** and press **Enter**. Locate the following registry key:  
**[HKEY\_LOCAL\_MACHINE\SOFTWARE\Quadrox\OctoPlus3\Drivers\{20AD6656-51AC-4C29-8C53-AC3FE478E3CA}\GUID]**

where **GUID** is identification of the card in the unit.

3. In the right pane, change the values for brightness and/or contrast according to what a customer wants (by default they are 90 and 100). These values are between 0 and 255 in decimal format.

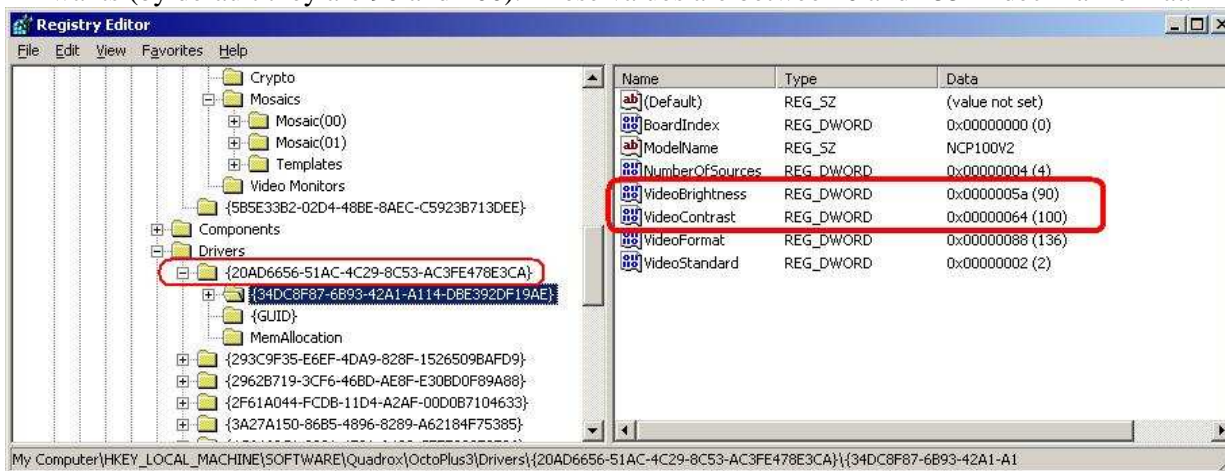

4. **Start** video server